BRIDGEWATER DIRECT
IN ASSOCIATION WITH BRIDGEWATER LAMINATE PRODUCTS

NBS SPECIFICATION


N10 General Fixtures/Furnishings/Equipment

Laminate Worktop with Integral Coved Upstand

PROJECT	PREPARED FOR	DATE	REVISION / STATUS
[Insert project name]	[Architect / Contractor]	November 2026	A — For Approval

200 WORKTOPS — LAMINATE WITH COVED UPSTAND

Location	Refer to Architect's drawings.
Manufacturer	Bridgewater Direct, Unit 1C Britannia Business Park, Union Road, Bolton BL2 2HP. Tel: 0161 703 3980 · sales@bridgewaterdirect.co.uk · www.bridgewaterdirect.co.uk
Product reference	Laminate Worktop with Integral Coved Upstand — 40 mm core, 75 mm coved upstand
Construction	40 mm chipboard core faced in non-porous, wipe-clean high-pressure laminate (HPL).
Rear upstand	75 mm integral coved upstand, formed in one piece with the worktop surface, with no seam at the back edge. 115 mm overall height.
Front edge & ends	Postformed front edge. Both ends capped.
Size, to the millimetre	Width 400–2900 mm, wall to wall. Depth 400–900 mm, including the upstand.
Cut-outs & joints	Sink cut-outs, tap holes, joints and non-standard layouts quoted from the project drawing.
HTM 63 status	Not supplied as an HTM 63 product and carries no hygiene certification. Where the specification names HTM 63, use the Bridgewater Direct HTM 63 Laminate Worktop.
Colour (Architect to select)	BD White, BD Dove Grey, BD Graphite, BD Natural Oak, BD Pearl Stone or BD Slate Stone.

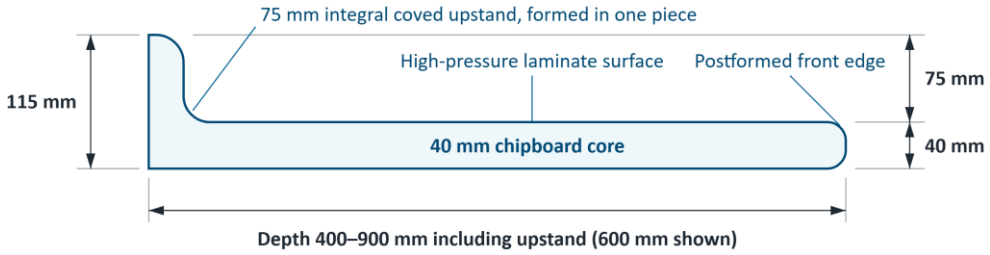

Section through the worktop, 600 mm depth shown. Upstand thickness and radii are indicative: refer to the manufacturer.

INSTALLATION

- **Programming:** Do not install until the building is weathertight and dried out and wet trades have finished.
- **Measuring:** Wall to wall at the back, then front to back at the deepest point. Confirm before manufacture.
- **Modifications:** Do not cut, plane or sand prefinished components. Seal all edges of any opening cut on site.
- **Fixing by others:** Secure to the supporting units or framework and seal the upstand to the wall.
- **Moisture and movement:** Make adequate allowance for future movement.

SAMPLES & TECHNICAL SUPPORT

Decor samples, datasheets and project advice are available direct from Bridgewater Direct: call 0161 703 3980 or email sales@bridgewaterdirect.co.uk quoting the product reference above, or configure online at www.bridgewaterdirect.co.uk.